


Innovative
Stylish
Dynamic

泵送系统



PRO-551E

粘压特性表

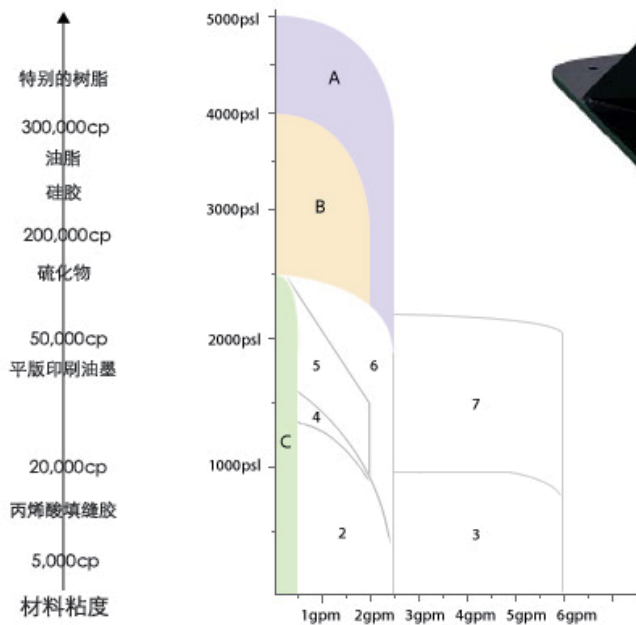

泵的选型

- A PRO-551E
- B PRO-401P
- C PRO-201P

使用一些粘性材料时，您可以选择HASCO：
硅胶 油脂 密封剂
粘接剂 其它高粘度涂料



PRO-551P



PRO-201P



PRO-401E



PRO-401P

	PRO-551E/55E000	PRO-551P/55P000	PRO-401E/40E000	PRO-401P/40P000	PRO-201P/20P000
空气马达	45100	55P100		28100-W	
泵体	55E200	55P200	40E200		20P200
升降立柱	55E300	55P300	40E300	40P300	20P300
调压阀	55E400	55P400		20P400	
流体压缩比	55: 1	50:1	40: 1		16: 1
工作循环/分钟	50				60
流量/分钟 (L)	9.46	4.53	6.30		5.44
最大流体压力 (bar)	385	350	280		112
进气压力范围 (bar)	3-7				
行程 (mm)			120		100
重量 (净重 kg)	249	104	130	94	85
尺寸 (cm)	102×78×158	60×44×143	85×50×136	60×44×125	60×44×125
推荐应用	高粘度流体				
选配	55E300-A-A1 20L	-			

上海力桥自动化技术有限公司
Shanghai Teridge Automation Co.,Ltd.

上海康桥路787号中天科技园10号楼213-215
213-215, Building 10, No.787 Kangqiao Road,
Shanghai,P.R.China,Zip:201315

Tel:+86-21-6045 0337
Fax:+86-21-6045 0363
www.teridge.com